# HENRY 3000D POWER SUPPLY

AS MODIFIED FOR:

1. SINGLE PHASE INPUT
2. 5000V OUTPUT UNDER 1.8 AMP LOAD
3. 2-3 SECOND DELAY ON POWER-UP — (SLOW-START)

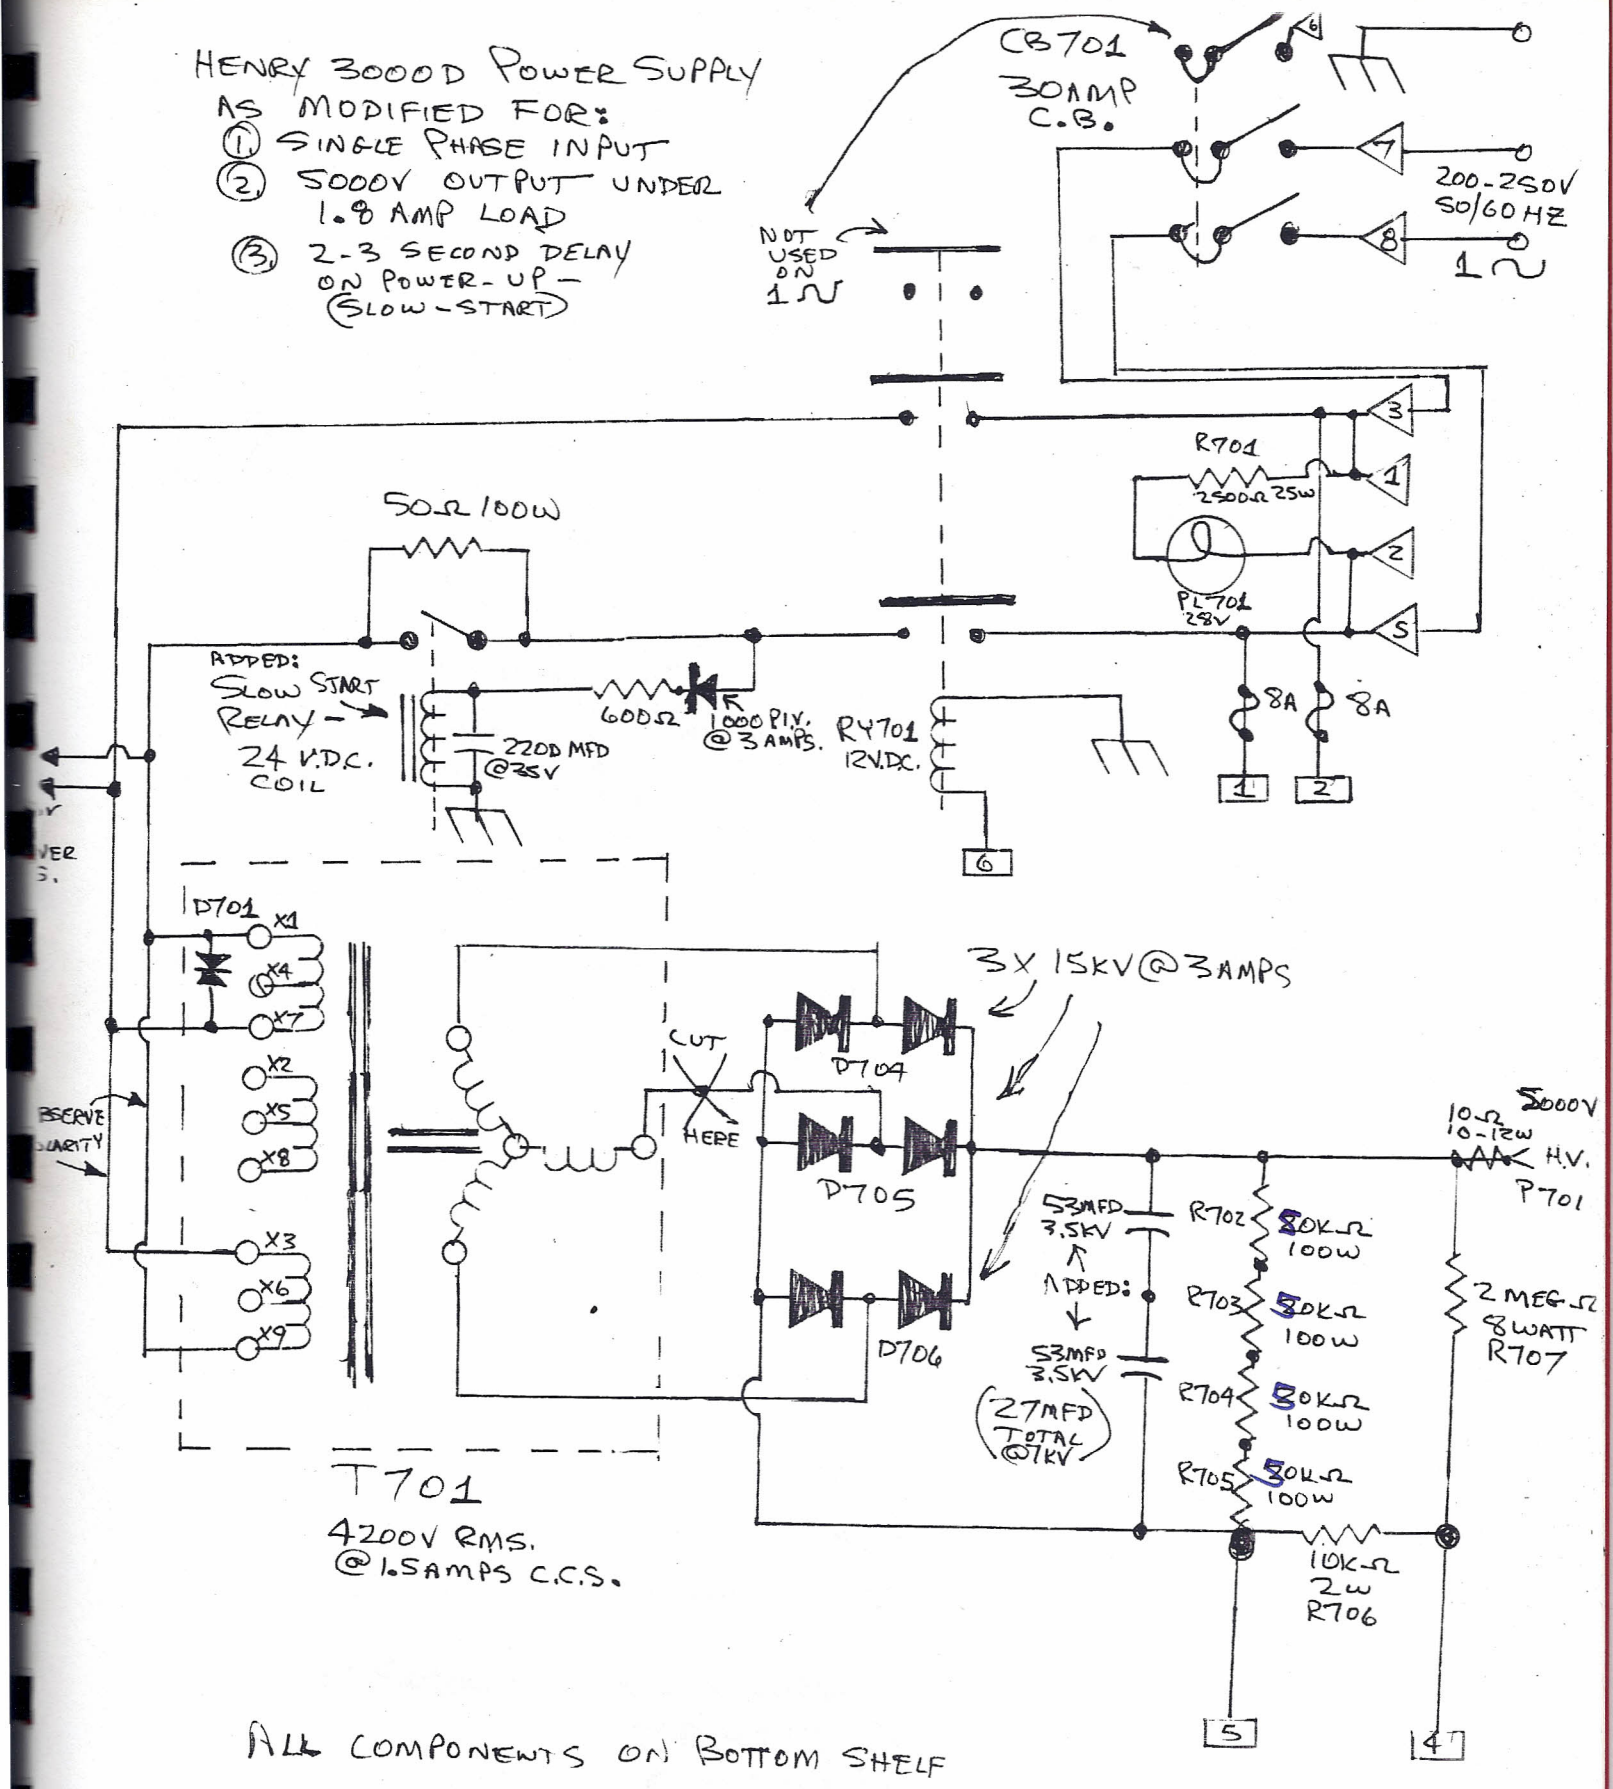


ALL COMPONENTS ON BOTTOM SHELF

□ = TB702

◁ = TB701

K5PC - 1996

80 METER HENRY 3000D